



170
l/min
44.9
USGPM



15
bar
218
PSI

POLY 2180


28.9220.97.3 - VD

28.9267.97.3 - VC

Four piston semi-hydraulic diaphragm pump.

Насос с 4 полугидравлическими узлами мембрана - поршень.

Pumpe mit 4 halbhydraulischen Kolbenmembranen.

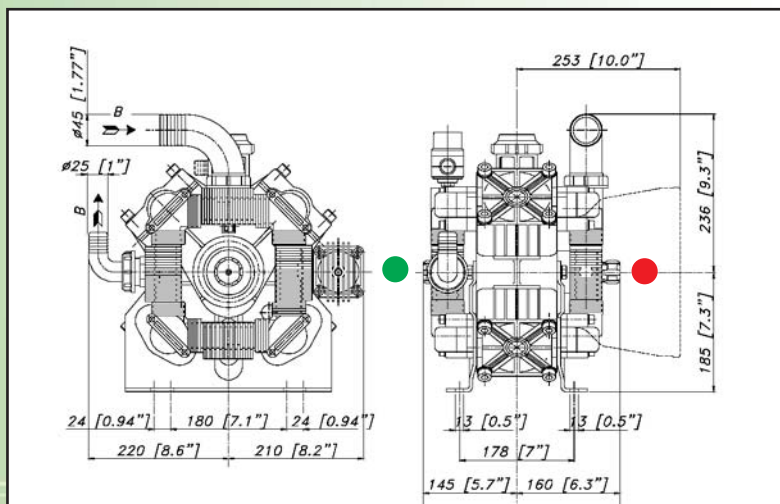

Optional:

PERFORMANCE CHART - ТАБЛИЦА ПРОИЗВОДИТЕЛЬНОСТИ WIRKLEISTUNGSTABELLE

POLY 2180		R.P.M. - об/мин - Drehzahl							
		400		450		500		550	
BAR	P.S.I.	L/min. л/мин USGPM	Kw кВт HP	L/min. л/мин USGPM	Kw кВт HP	L/min. л/мин USGPM	Kw кВт HP	L/min. л/мин USGPM	Kw кВт HP
2	29	124 32,7	0,5 0,6	139 36,7	0,5 0,7	155 40,8	0,6 0,8	170 44,9	0,7 0,9
5	72,5	123 32,5	1,2 1,6	138 36,5	1,4 1,8	154 40,6	1,5 2,0	169 44,6	1,7 2,2
10	145	121 32,1	2,4 3,2	137 36,1	2,7 3,6	152 40,1	3,0 4,0	167 44,1	3,3 4,4
15	218	120 31,7	3,5 4,7	135 35,7	4,0 5,3	150 39,6	4,4 5,9	165 43,6	4,9 6,5

Specifications Технические характеристики Technische Daten				Mod. POLY 2180	
R.P.M.; об/мин; Drehzahl	об/мин	R.P.M.	550	550	
Power - Мощность - Leistung	кВт	HP	4,9	6,5	
Weight - Вес - Gewicht	кг	lb	26	57,2	
Negative pressure Перепад уровней всасывания Saughöhenunterschied	MAX	M	ft	1,5	4,9
	Discontinuous service Aussetzender Betrieb	M	ft	3	9,8
Ø Intake - Всасывание - Saugleitung	mm	in	45	1 3/4	
Ø High pressure - Напор - Druckleitung	mm	in	25	1"	
MAX Temperature - Температура - Temperatur	°C	°F	60	140	
Oil type - Тип масла - Ölsorte	SAE	W	30	30	
Oil capacity - Объем масла - Ölfassungsvermögen	л	U.S.G.	2,1	0,55	

PUMP SHAFT - ВАЛ НАСОСА - PUMPENWELLE



FRONT - ПЕР.
VORN



REAR - ЗАД.
HINT.



REAR - ЗАД.
HINT.

